





- Recessed ground floodlights suitable for pathways and driveways
- Adjustable symmetrical optics
- Available in the following versions:
 - Double ended MH
 - S/ended MH (G12, G8.5, PGJ5)
 - Compact Fluorescent
- The frame, ring and screws are in stainless steel with the housing and recessed housing in high resistant thermoplastic with a 99.9% pure aluminium reflector
- 15 mm outer tempered glass
- The D/ended MH version has an anti-dazzle "plate screener" in nickel-plated steel
- Materials used to construct these fittings are of high quality and preserve the fitting from oxidising agents
- Designed to withstand static loads of 3000kgs (fig.2) except Achille 190 which can only withstand up to 2000kg

- Fittings include integral control gear
- Can be installed on normally flammable surfaces
- Class 2
- IP 67

INSTALLATION:

- Recessed housing to be ordered separately with the exception of Achille 190
- Fitting can be installed without any fixed reference to the positioning of the inner housing
- Once positioned, the fitting can be installed and rotated 360° (fig.1a)
- Anchorage of housing is assured by a blocking system (fig.1b)
- The junction box located in the lower part of the fitting is independent from the inner body (fig.3)
- Through-wiring with double cable gland is possible
- A third cable gland situated between the box and inside





Stainless
Steel Ring/
Black
Housing



code lamp details




Achille 450 symmetrical double ended metal halide uplighter

IV/147300 70W 230V Rx7s
IV/147400 150W 230V Rx7s
IV/147500 250W 230V FC₂



Achille 450 asymmetrical double ended metal halide uplighter




IV/147600 70W 230V Rx7s
IV/147700 150W 230V Rx7s
IV/147800 250W 230V FC₂

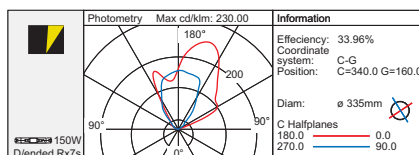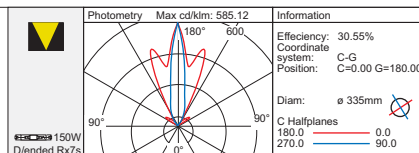

code lamp details

Achille 450 symmetrical fluorescent uplighter

IV/147100 2 x 42W 230V Gx24q-4
IV/147200 2 x 57W 230V Gx24q-5

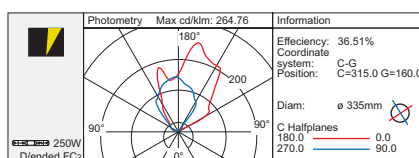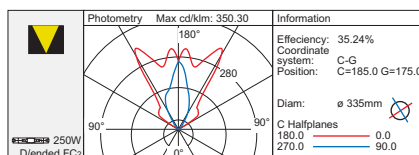

code lamp details




Achille 320 metal halide uplighter

IV/148400 70W 230V G12
IV/148500 150W 230V G12
IV/148600 70W 230V Rx7s
IV/148700 70W 230V G12 EL



Achille 320 fluorescent uplighter

IV/148100 32W 230V Gx24q-3
IV/148200 42W 230V Gx24q-4

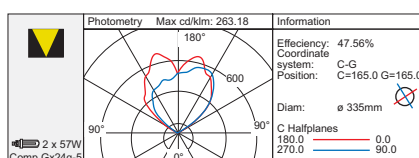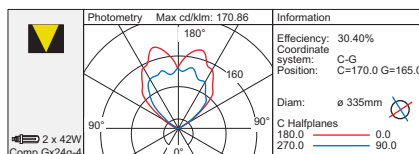




code lamp details

Achille 190 metal halide uplighter

IV/149100 35W 230V G8.5
IV/149200 20W 230V PGJ5

Includes recessed housing

Please note: This version can only withstand weights up to 2000kgs

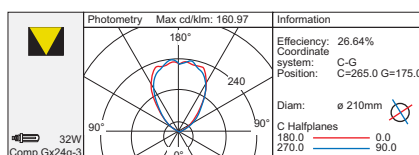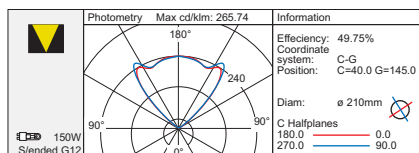

Accessories

code details

Recessed housing for Achille 450/320

IV/160349 Achille 450
IV/160348 Achille 320

