



- High power LED downlight range
- The Body of the Plaf is made in die-cast aluminium with a high resistant faceted polycarbonate reflector coated in aluminium (fig. 1)
- The reflector is available for the following beam angles:
 - 120° (IV/3880-01-21)
 - 50° (IV/3880-02-21)
- Utilises a 14W warm white LED (3000k) with a lumen output of 1200lm
- 230V supply includes led driver
- Can be installed on normally flammable surfaces
- Class 1
- IP20

Fig. 1







21
White



code lamp details
120° Reflector 1200lm
IV/3880-01-21 14W 230V
 Includes Integral LED driver

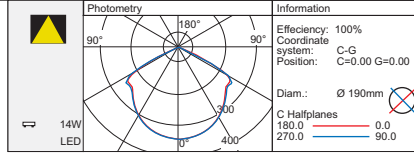

code lamp details
50° Reflector 1200lm
IV/3880-02-21 14W 230V
 Includes Integral LED driver

